

Faucet-mounted Water Purifier

CSP801E



Be able to drink directly tap water after filtered

Qualified American standards of NSF 42 and NSF 53

- Has been tested with tap water at 63 provinces all over the country
- Super high grade technology with compact design
- Easy installation


MADE IN JAPAN

The filtered water from Cleansui water purifiers has been tested in Vietnam and qualified by the authorized organizations.

QCVN 01:2009/BYT, QCVN 06-1:2010/BYT




SUPER HIGH GRADE

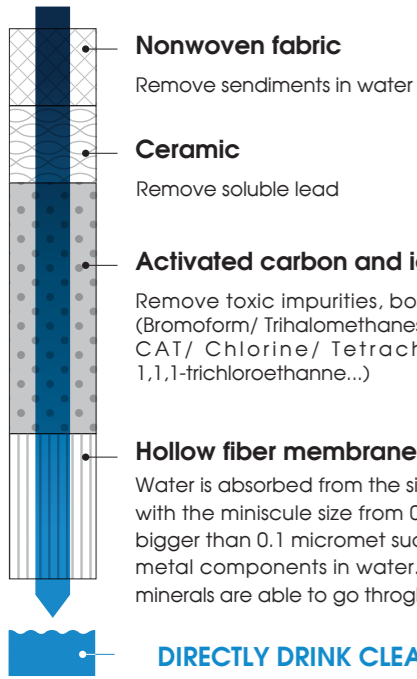

WATER FILTER WITH 4 LAYERS

3 water using modes
Shower & Straight/streaming mode for tap water and filtered water

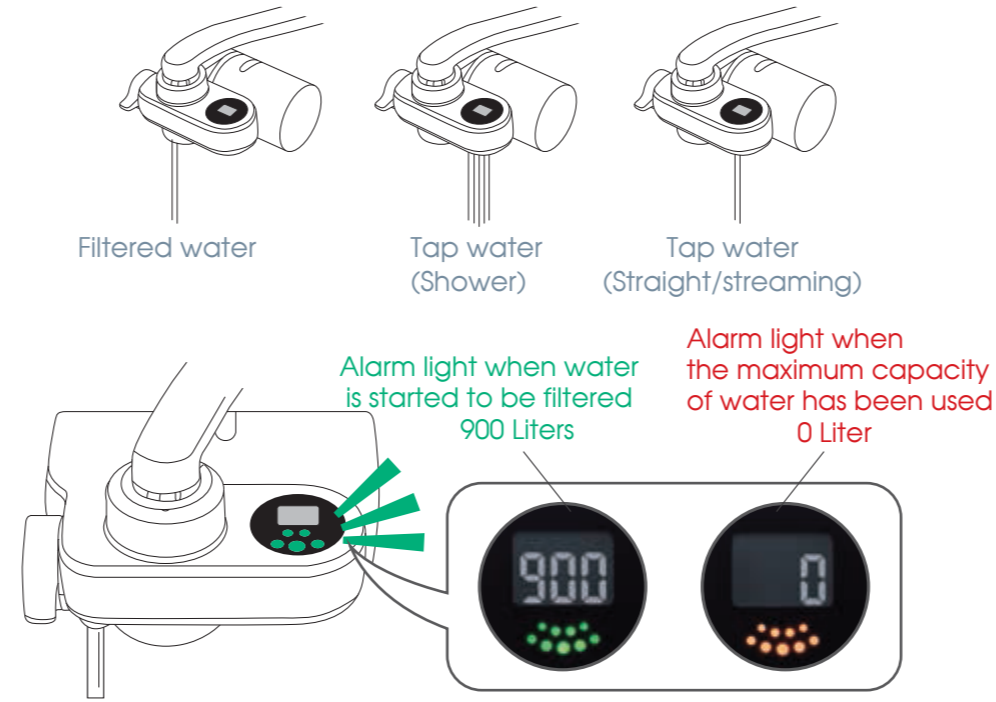

CSP801E QUALIFIED TESTING STANDARDS

- QCVN 01:2009/BYT - National technical regulation for drinking water
- QCVN 06-1:2010/BYT - National technical regulation for bottled natural mineral water and drinking water
- JIS-S 3201:1999/2010 - Japanese Industrial Standards
- Qualified American standards of NSF42 and NSF53 (NSF is the co-operation center of food and drink safety under WHO organization)

AVAILABLE ATTACHMENTS ALLOW EASY INSTALLATION ON ALMOST ANY TYPE OF FAUCET

COMPACT DESIGN, EASY TO INSTALL OR UNINSTALL

WATER CAPACITY **900 LITERS**



MITSUBISHI CHEMICAL CLEANSUI

CUSTOMER SERVICE
HOTLINE : 0902 57 57 39

Email: support@mitsubishicleansui.vn
Website: www.mitsubishicleansui.vn



HCM CITY HEAD OFFICE
No. 12, D1 St, Him Lam Residential Area, Tan Hung Ward, Dist 7, HCM City.
Hotline: 18008171
Fax: (028) 2253 0481/ 2253 0482

HANOI BRANCH
Floor 5, VG Building No.235 Nguyen Trai St, Thanh Xuan Trung Ward, Thanh Xuan Dist, Ha Noi City.
Tel: (024) 6269 1160
Fax: (024) 6269 1159/61

SAVING COST - FRIENDLY WITH ENVIRONMENT

MITSUBISHI CHEMICAL CLEANSUI
Cleansui



1 HGC9E-S Cartridge

PRICE :950.000 VND
~1.055 VND/Liter

1,5L Water bottle



600 bottles of 1,5 Liter

PRICE :6.000.000 VND
~6.667 VND/Liter

With **CLEANSUI** water purifier, you can save **5.050.000 VND (84%)**

Easy install with connection kits into attached faucet

	Round or straight edge	Aerator faucet with internal threads	Aerator faucet with external threads	Other Aerator faucets	Types of faucet without connection accessories
Easy install with connection kits into attached faucet					
	• Direct connection A 16mm 19mm	• Internal connection B (W-22) (M-22)	• External connection C (W-23) (M-24)	• Others D	

Model	CSP801E	Removed substances (JIS S3201)	
Cartridge No.	HGC9E-S	Excess chlorine	900 L (remove 80%)
Filter capacity	900 liters	Turbidity	900 L (water flow rate 50%)
Water flow rate	1.6 liters/minute	Trihalomethanes	900 L (remove 80%)
Water working pressure	0.07 MPa	Chloroform	900 L (remove 80%)
Filter technology	Mitsubishi Chemical Cleansui	Bromodichloromethane	900 L (remove 80%)
Filter structure	Nonwoven fabric	Dibromochloromethane	900 L (remove 80%)
	Ion exchange fiber	Bromoform	900 L (remove 80%)
	Activated carbon	Soluble lead	900 L (remove 80%)
	Hollow fiber mambrane	CAT (Chemical/ pesticides)	900 L (remove 80%)
Expiration date	3 months (10 liters/ day)	2-MIB (molds)	900 L (remove 80%)
(Japanese standard JIS S 3201)		Tetrachloroethylene	900 L (remove 80%)
Dimensions (diameter x depth x height)	126 x 112 x 79mm	Trichloroethylene	900 L (remove 80%)
Weight (when filled with water)	310g (430g)	1,1,1-trichloroethane	900 L (remove 80%)
Material (cartridge, faucet)	ABS Plastic		
Accessories	Attachments	KEEP MINERALS IN WATER	
Origin	Japan	Applied water: TAP WATER	
Qualified standards	JIS S 3201 / NSF / ISO9001-14001		
International & VN inspection	QCVN 01:2009 / QCVN 6-1:2010/BYT		